


1 2 3 4 5 6 7 8

A






### Specifications:

Material: Polyester, UL 94V-2, UL 94V-0  
 Voltage Rating: 300V  
 Current Rating: 5A  
 Withstand Voltage: 1500V AC/Minute  
 Insulation Resistance: 1000MΩ min.  
 Temperature Range: -25°C~+85°C  
 Contact Resistance: Initial value/10m max.  
 After environmental testing/20mΩ max.  
 Applicable Wire:AWG#18 TO #24

B

C

D

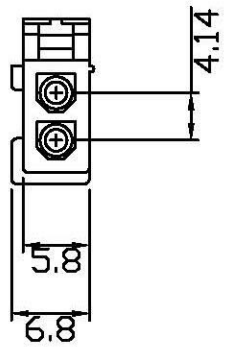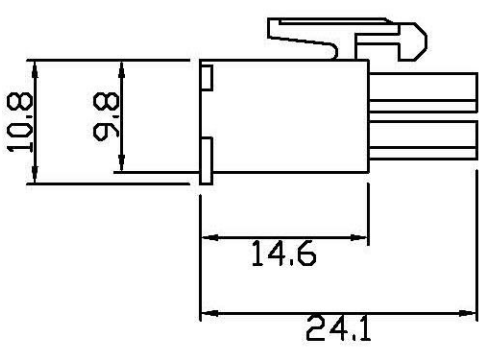

E

F

G

H

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN		TOLERANCE 容許公差 0 ± .00 ± ANG ±	PART NAME 品名 φ 1.0mm MALE HOUSING 1X2P UL94V-X MATERIAL WHITE COLOR LOW-LEAD
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2011/05/19	PAGE 張數 1 OF 1	REV. 版本 B	PART NO. 料號 H1110-02PSXW00R

1 2 3 4 5 6 7 8