
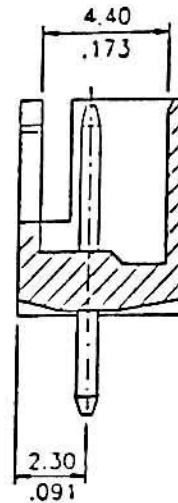
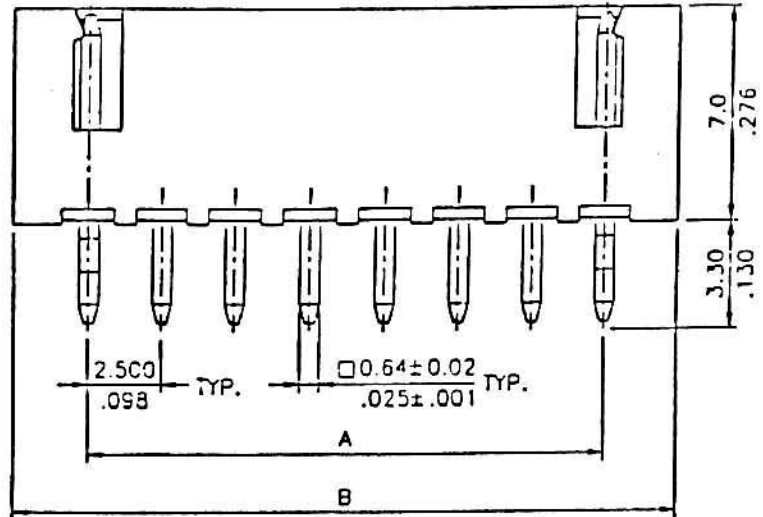


SPECIFICATION

Current Rating: 2.5A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25° C ~+85° C
 Contact Resistance: 20 m ohms Max.
 Insulation Resistance: 1,000M ohms Min.
 Withstanding Voltage: 1,000V AC/minute.
 Material: Nylon 66, UL94V-0
 Pin: Brass, Tin Plated

CIRCUIT	DIMENSION	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.10
8	17.50	22.60
9	20.00	25.10
10	22.50	27.60
11	25.00	30.10
12	27.50	32.60
13	30.00	35.10
14	32.50	37.60
15	35.00	40.10
16	37.50	42.60
17	40.00	45.10
18	42.50	47.60
19	45.00	50.10
20	47.50	52.60

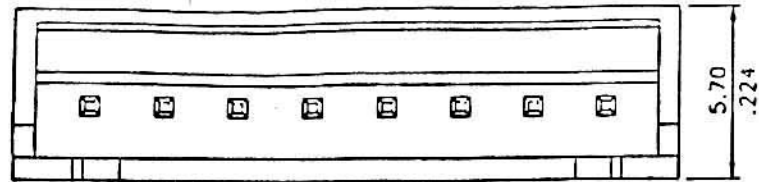

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO.,LTD.

製表日:2000/05/14

DWG. APPROVED
 TINA SHELLY

UNIT
 MM
 INCH

APPD. CKD.

SCALE

2 : 1

TOLERANCE

± 0.5

PART NAME

XH 2.5 WAFER 180°

PART NO.

W7600-XXPSXTX0R

REV.

A