
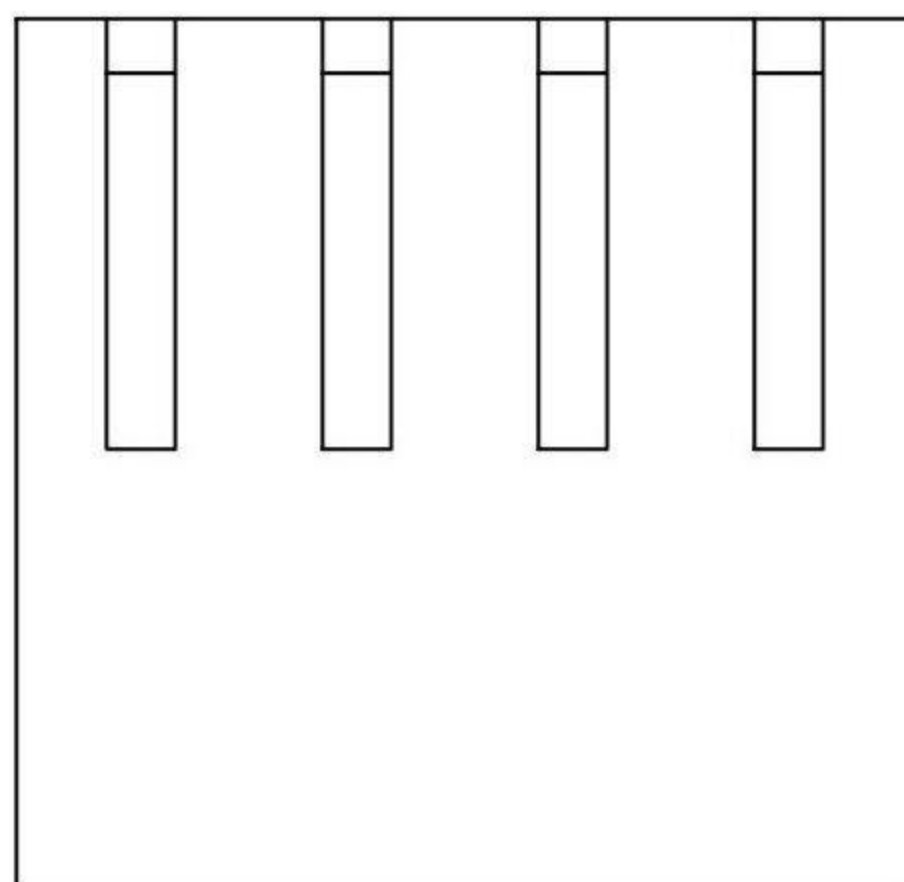
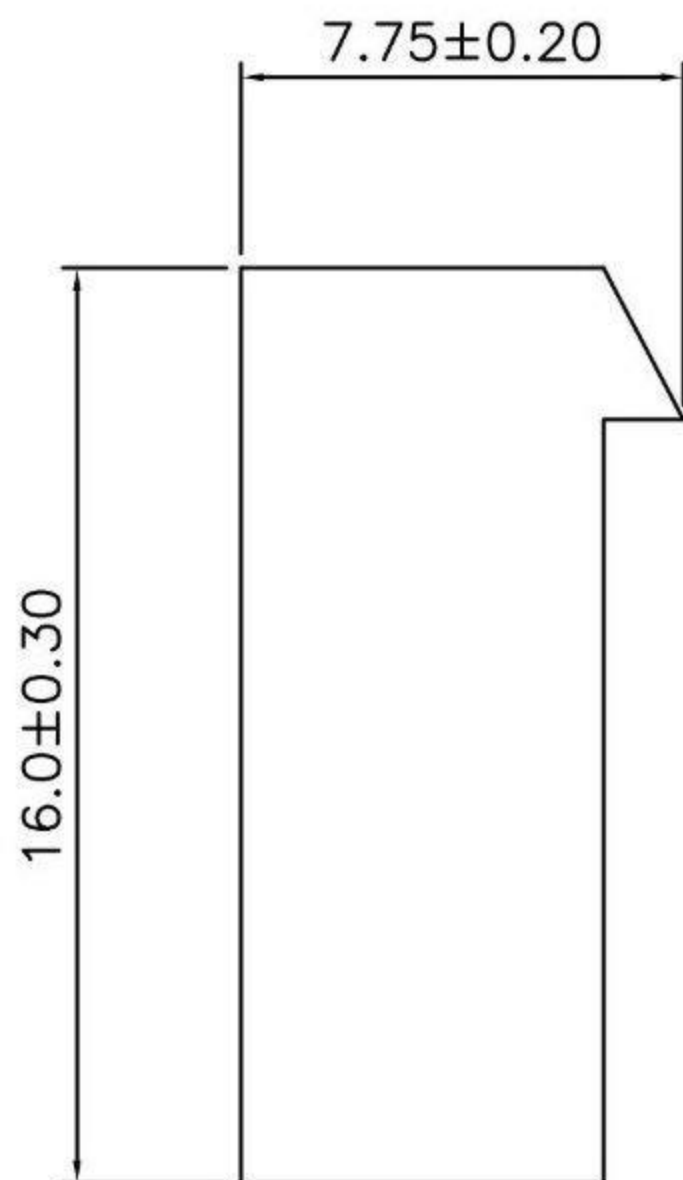


HOUSING RoHS COMPLIANT

Poles: 2-20
 Material: Nylon 66, UL94V-2
 Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage rating: AC,DC, 250V
 Current rating: AC,DC, 7A
 Withstand voltage: AC 1000V/min
 Insulation resistance: 1000MΩ max.
 Temperature range: -25°C~+85°C
 Applicable PC board thickness: 1.6mm
 Contact resistance: Initial value/10MΩ max.
 After environmental Testing/20MΩ max.

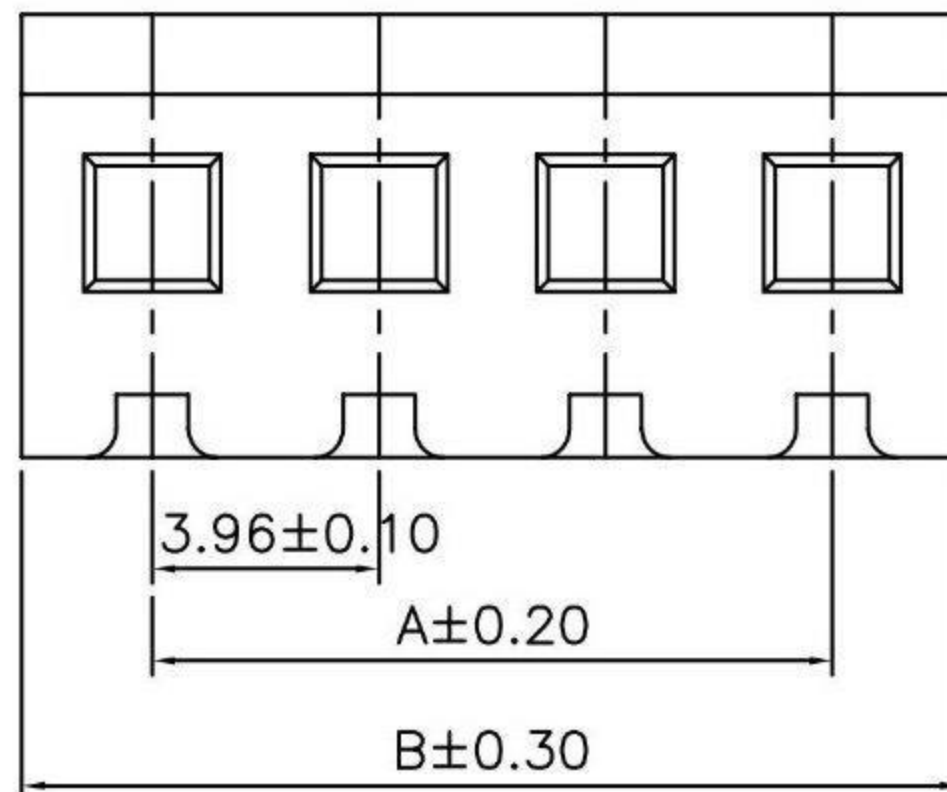

Poles	Dimension in. (mm)	
	A	B
2	0.156(3.96)	0.335(8.52)
3	0.312(7.92)	0.491(12.48)
4	0.468(11.88)	0.646(16.44)
5	0.624(15.84)	0.803(20.40)
6	0.780(19.80)	0.959(24.36)
7	0.935(23.76)	1.115(28.32)
8	1.091(27.72)	1.271(32.28)
9	1.247(31.68)	1.427(36.24)
10	1.403(35.64)	1.583(40.20)
11	1.559(39.60)	1.739(44.16)
12	1.715(43.56)	1.894(48.12)
13	1.871(47.52)	2.050(52.08)
14	2.027(51.48)	2.207(56.04)
15	2.183(55.44)	2.362(60.00)
16	2.339(59.40)	2.518(63.96)
17	2.494(63.36)	2.674(67.92)
18	2.650(67.32)	2.830(71.88)
19	2.806(71.28)	2.986(75.84)
20	2.962(75.24)	3.142(79.80)

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. HELEN		SCALE 比例 參考	.0 ± 0.25 .00 ± 0.15 ANG. ± 2°
DATE 制表日	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO.
2010/12/30	PAGE 張數 1 OF 1	REV. 版本 A	料號 H2410-XXPYW0000R