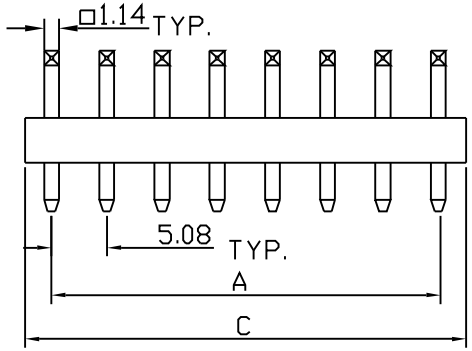

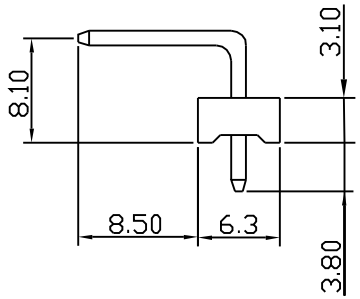

W/O Back

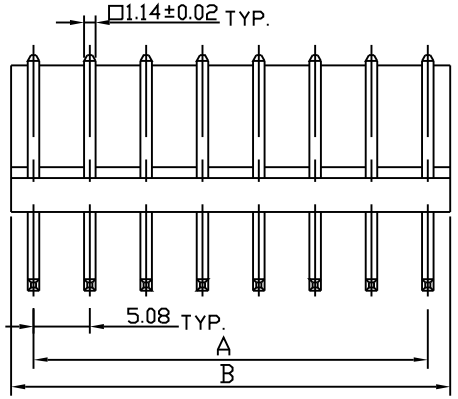

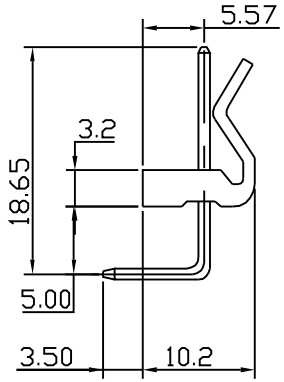

W/Back



PCB LAYOUT

SPECIFICATION

Voltage Rating: 250V AC/DC
Current Rating: 5A AC/DC
Temperature Range: -25° C ~+85° C
Contact Resistance: 10 Milliohms Max.
Insulation Resistance: 1,000 Megohms Min.
Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.
Material: Nylon 66, UL94V-2
Color: White
Pin: Brass, Tin Plated

Poles	Dimension		
	A	B	C
2	5.08	10.22	10.30
3	10.16	15.30	15.40
4	15.24	20.38	20.50
5	20.32	25.46	25.60
6	25.40	30.54	30.70
7	30.48	35.62	35.80
8	35.56	40.70	41.00
9	40.64	45.78	46.10
10	45.72	50.86	51.20

ORDER INFORMATION

W5080—

Contact No.	Contact Type	Function	Body Option	Contact Plating	Insulator Color	
10	P	R	Y	T	W	0
02-10	P: Non Distribution	R: Right Angle	Y: W/ Back N: W/□ Back	T: Tin S: Selective Gold G: Gold Flash	W: White	Fill It With "0"

玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		UNIT	SCALE	PART NAME	
		MM	3 : 1	MX5.08 WAFER 90°	
制表日:2002/12/04	DRAWING.	APPD. CKD.	TOLERANCE	PART NO.	REV.
	Jane		± 0.3	W4508-XXPRXXW0	A

PDF created with pdfFactory trial version www.pdffactory.com