



1 2 3 4 5 6 7 8

A

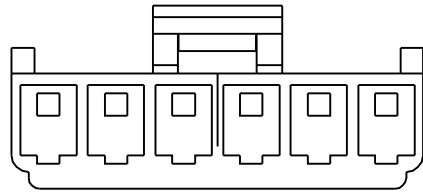

B

C

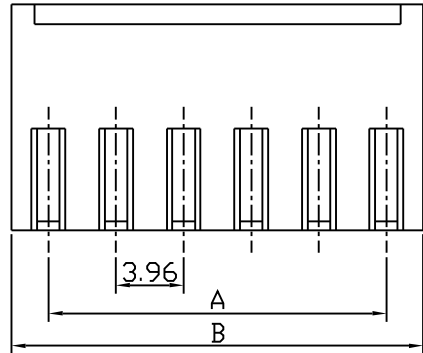

D

E

**SPECIFICATION**

Voltage Rating: 250V AC/DC  
 Current Rating: 5A AC/DC  
 Temperature Range: -25 ° C ~+85 ° C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1,000 Megohms Min.  
 Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.  
 Material: Nylon 66, UL94V-0  
 Color: White


A

B

C

D

E



Poles	Dimension In. (mm)	
	A	B
2	3.96	8.04
3	7.92	12.10
4	11.88	15.96
5	15.84	20.00
6	19.80	23.90
7	23.76	27.90
8	27.72	31.92
9	31.68	35.88
10	35.64	39.84
11	39.60	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

**ORDER INFORMATION**

H3967-         
02-15      P: Non Distribution      W: White      Fill It With "0"      Fill It With "0"      Fill It With "0"      Fill It With "0"

F

G

**玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

UNIT

SCALE

PART NAME

MM

3 : 1

VH3.96 HOUSING

H

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

*Jane*

± 0.3

H3967-XXPW0000

A

1 2 3 4 5 6 7 8