

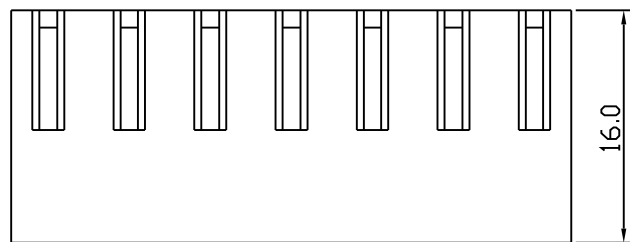


1 2 3 4 5 6 7 8

A
B
C
D
E

A
B
C
D
E

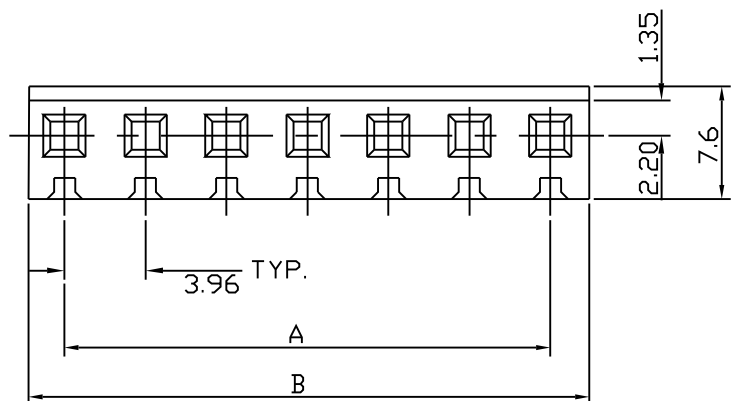

SPECIFICATION

Voltage Rating: 250V AC/DC
 Current Rating: 5A AC/DC
 Temperature Range: -25 ° C ~+85 ° C
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1,000 Megohms Min.
 Dielectric Withstanding Voltage: 1,500V AC/DC/Minute.
 Material: Nylon 66, UL94V-2
 Color: White

Poles	Dimension		Poles	Dimension	
	A	B		A	B
2	3.96	8.45	11	39.60	43.95
3	7.92	12.48	12	43.56	47.90
4	11.88	16.44	13	47.52	52.16
5	15.84	20.21	14	51.48	56.23
6	19.80	24.22	15	55.44	59.70
7	23.76	28.30	16	59.40	63.70
8	27.72	32.32	17	63.36	67.60
9	31.86	36.22	18	67.32	71.60
10	35.64	40.36	19	71.28	75.50
			20	75.24	79.50

ORDER INFORMATION

H2410 -

02-20 P: Non Distribution Y: W/Locking Rib W: White Fill It With "0"

N: W/O Locking Rib Fill It With "0"

G
H

G
H

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE		PART NAME	
MM		3 : 1		MX3.96 HOUSING	
APPD.	CKD.	TOLERANCE		PART NO.	REV.
		± 0.3		H2410-XXPXW000	A

制表日: 2002/12/04

DRAWING. *Jane* APPROVED

1 2 3 4 5 6 7 8