


1 2 3 4 5 6 7 8

A

A

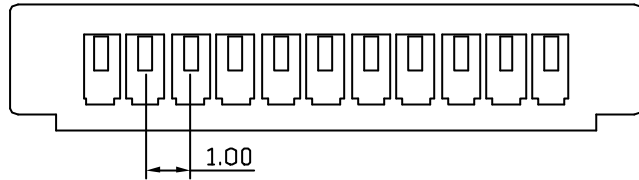

B

B

SPECIFICATIONS

Electrical


Current Rating: 1A AC, DC
 Voltage Rating: 50V AC/ max.
 Operating Temp.: -25 C ~ +85 C
 Insulation Resistance: 500M / min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Contact Resistance: 20M / max.

Material

Material: PBT, UL94V-0


C

C

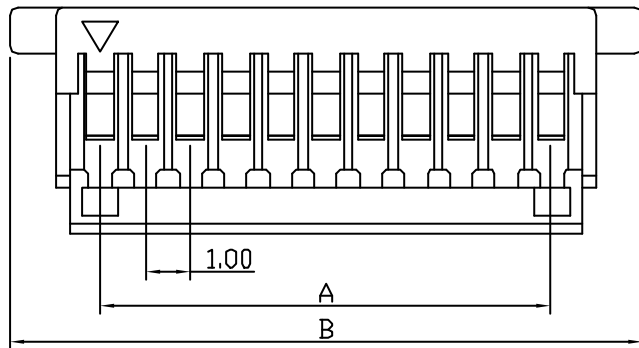

D

D



E

E

Poles	Dimension mm (in.)	
	A	B
2	1.0(0.039)	5.0(0.197)
3	2.0(0.079)	6.0(0.236)
4	3.0(0.118)	7.0(0.276)
5	4.0(0.157)	8.0(0.315)
6	5.0(0.197)	9.0(0.354)
7	6.0(0.236)	10.0(0.394)
8	7.0(0.276)	11.0(0.433)
9	8.0(0.315)	12.0(0.472)
10	9.0(0.354)	13.0(0.512)
11	10.0(0.394)	14.0(0.551)
12	11.0(0.433)	15.0(0.591)
13	12.0(0.472)	16.0(0.630)
14	13.0(0.512)	17.0(0.669)
15	14.0(0.551)	18.0(0.709)
16	15.0(0.591)	19.0(0.748)
17	16.0(0.630)	20.0(0.787)
18	17.0(0.669)	21.0(0.827)
19	18.0(0.709)	22.0(0.866)
20	19.0(0.748)	23.0(0.906)

F

F

G

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	SH1.0mm HOUSING	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	H9010-XXPW0000	A

H

H

制表日: 2003/08/26	DRAWING.	APPROVED
	Jane	

1 2 3 4 5 6 7 8