



1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

SPECIFICATION

Current Rating: 3A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25° C ~+85° C
 Contact Resistance: 20m Ω Max.
 Insulation Resistance: 1,000 MΩ Min.
 Withstanding Voltage: 800V AC/minute.
 Applicable Wire: AWG #22-28
 Insulation OD: 1.7mm(Max.)
 Material: Brass
 Finish: Tin Plated
 Q'ty: 6,000 pcs/Roll

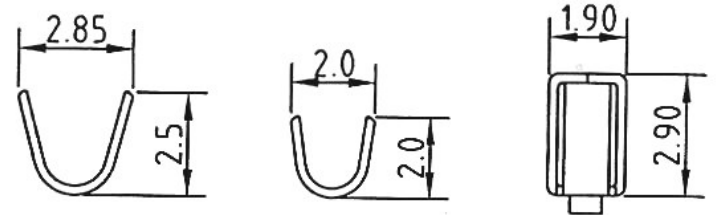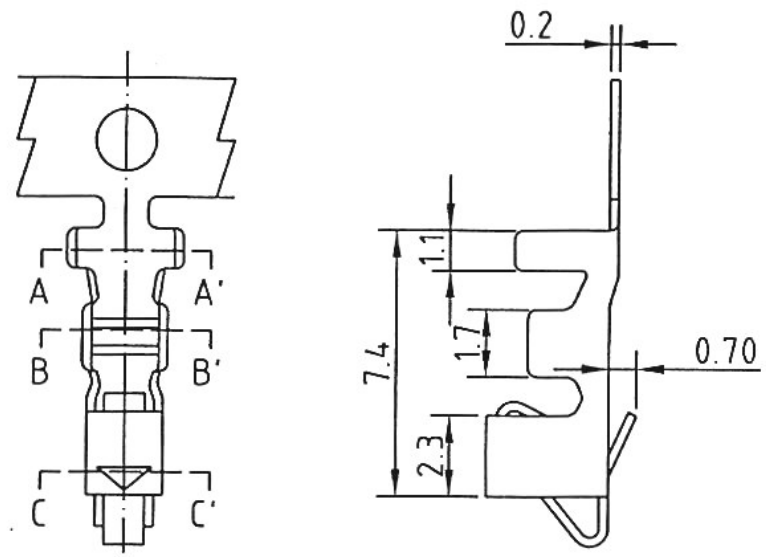

SECTION:A-A' SECTION:B-B' SECTION:C-C'

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE		PART NAME	
MM		6:1		NH2.5 TERMINAL	
APPD.	CKD.	TOLERANCE		PART NO.	REV.
		± 0.3		T2560-TBJ00000	A

制表日:2003/08/25

DRAWING. APPROVED
Jane

1 2 3 4 5 6 7 8