

PCB LAYOUT

SPECIFICATION

Voltage Rating: 250V AC/DC

Current Rating: 2A AC/DC

Temperature Range: -25 C To +85 C



Contact Resistance: 20Milliohms Max

Insulation Resistance: 1000Megohms Min

Withstanding Voltage: 800V AC/DC /Minute

Material: Nylon 66, UL94V-0

Pin: Brass, Tin Plated

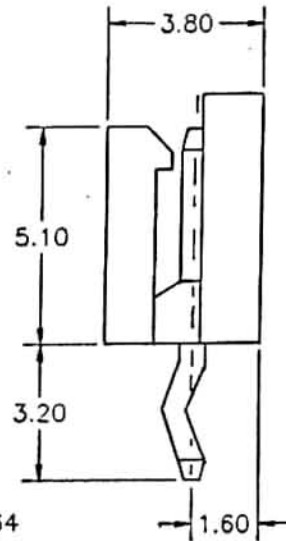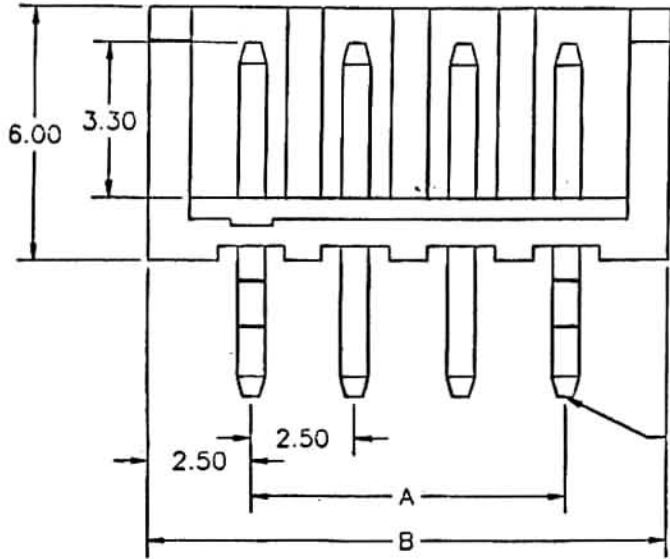

Poles	Dimension	
	A	B
2	2.5	7.5
3	5.0	10.0
4	7.5	12.5
5	10.0	15.0
6	12.5	17.5
7	15.0	20.0
8	17.5	22.5
9	20.0	25.0
10	22.5	27.5
11	25.0	30.0
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0

玄茂科技股份有限公司

HSUAN MAO TECHNOLOGY CO.,LTD.

製表日:2000/05/14

DWG. TINA
APPROVED SHELLY

UNIT
MM

SCALE
2 : 1

PART NAME

EH2.5 WAFER STRAIGHT

APPD. CKD. TOLERANCE
± 0.5

PART NO. REV.
W2620-XXPSXX00 A