
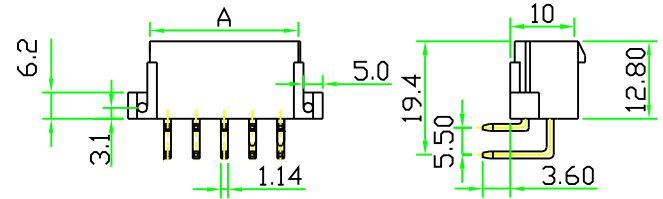
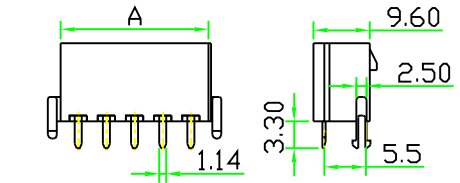
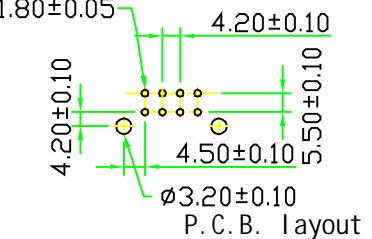

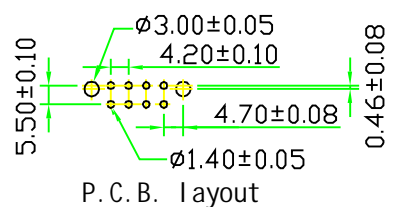


SPECIFICATION

Electric
 Current Rating: 7A AC, DC
 Voltage Rating: 250V AC, DC
 Contact Resistance: 10m Ω Max.
 Insulation Resistance: 1000M Ω Min









Material
 Insulator: Nylon 66, UL94V-2
 Pins: Brass, Tin Plated

Poles	Dimension in(mm)	
	A	B
2	5.05	—
4	9.70	4.20
6	13.90	8.40
8	18.10	12.60
10	22.30	16.80
12	26.50	21.00
14	30.70	25.20
16	34.90	29.40
18	39.10	33.60
20	43.30	37.80
22	47.50	42.00
24	51.70	46.20



W/□ Mounting Ears & W/ Polarizing Pegs

W/ Mounting Ears & W/□ Polarizing Pegs

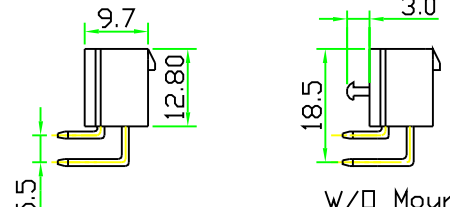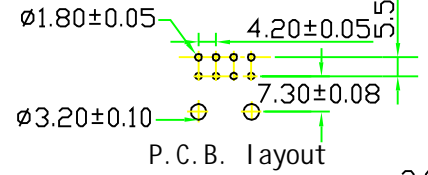

W/□ Mounting Ears & W/□ Polarizing Pegs

W/□ Mounting Ears & W/□ Polarizing Pegs

W/□ Mounting Ears & W/ Polarizing Pegs

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		1:1	MINI FIT 4.2mm WAFER	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	W4505-XXPDXXTW	A

制表日: 2003/11/04

DRAWING. APPROVED
kevin