





- * Poles:4-80
 - * Material:NORYL UL 94-V1 ,BLACK
- Specifications**
- * Current rating: 3A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 800V AC/minute

Polarizing Plug


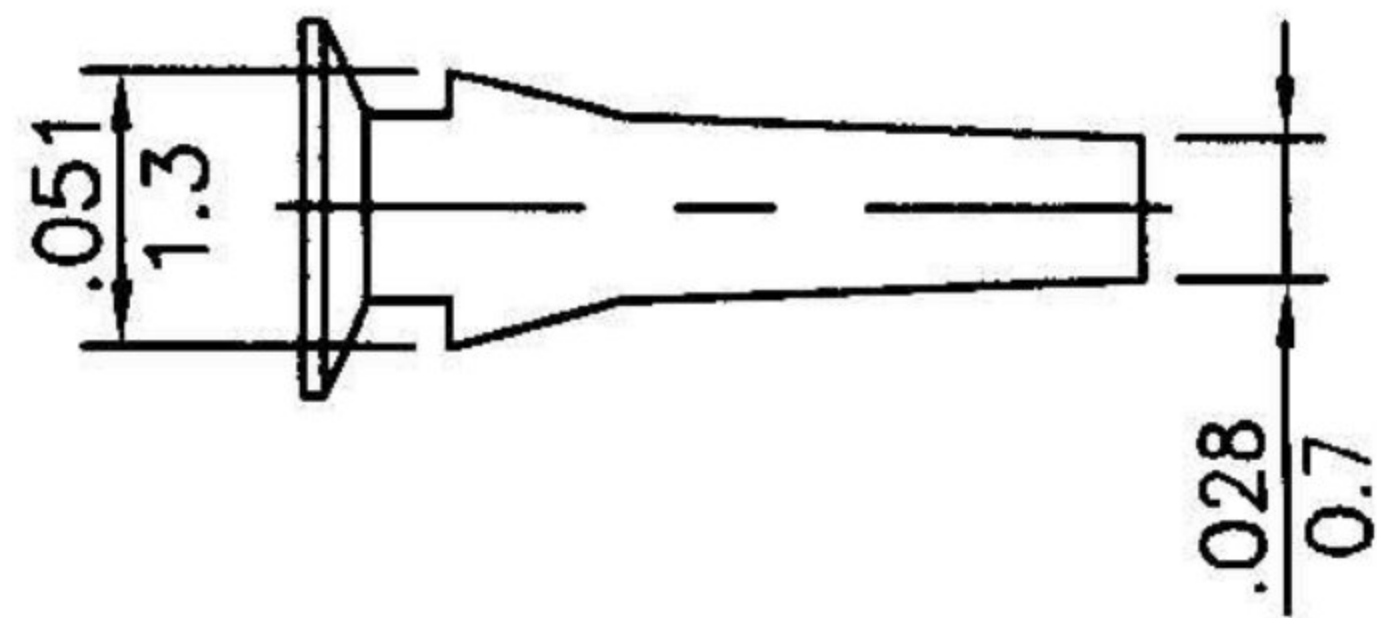


P/N : H4000-KABW00000R

P/N : H4000-XXPDNB00R

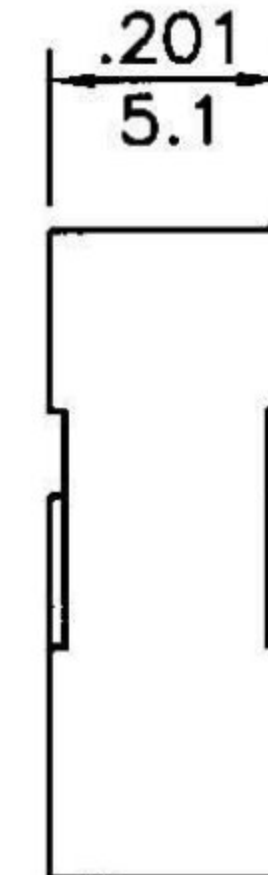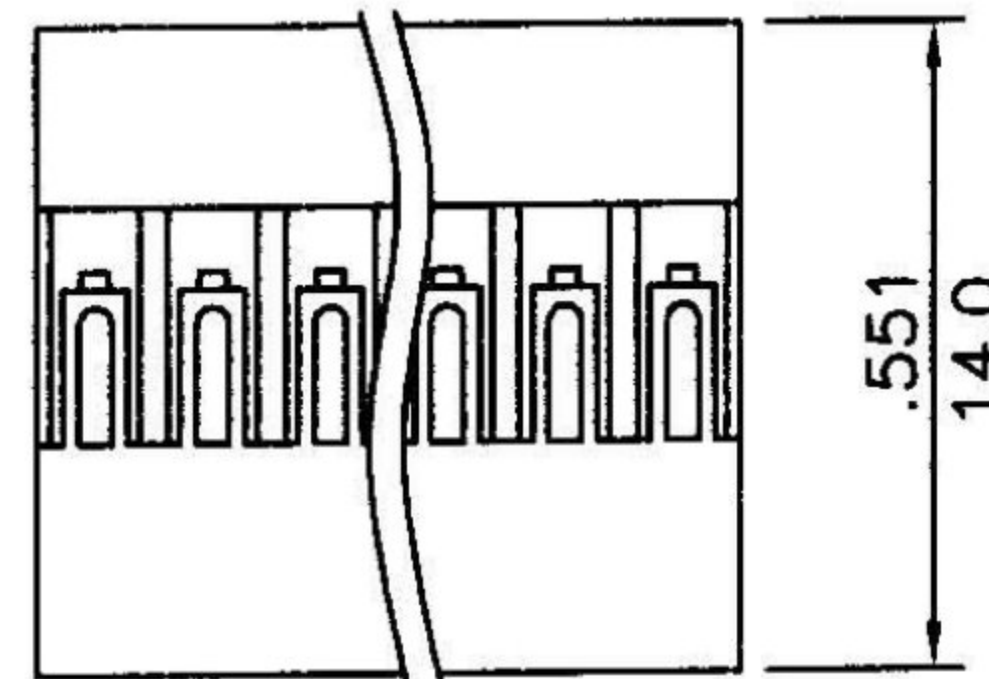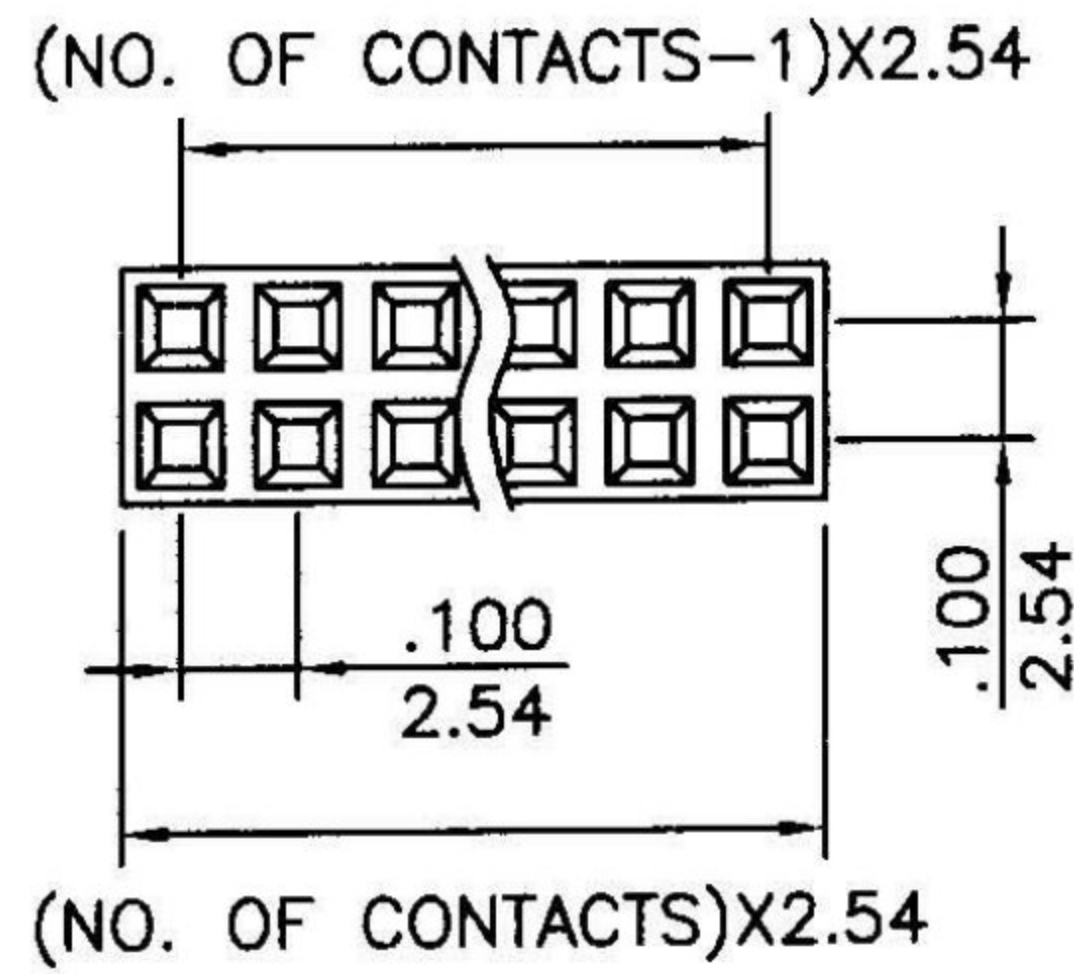

P/N : H4000-XXPDYB00R

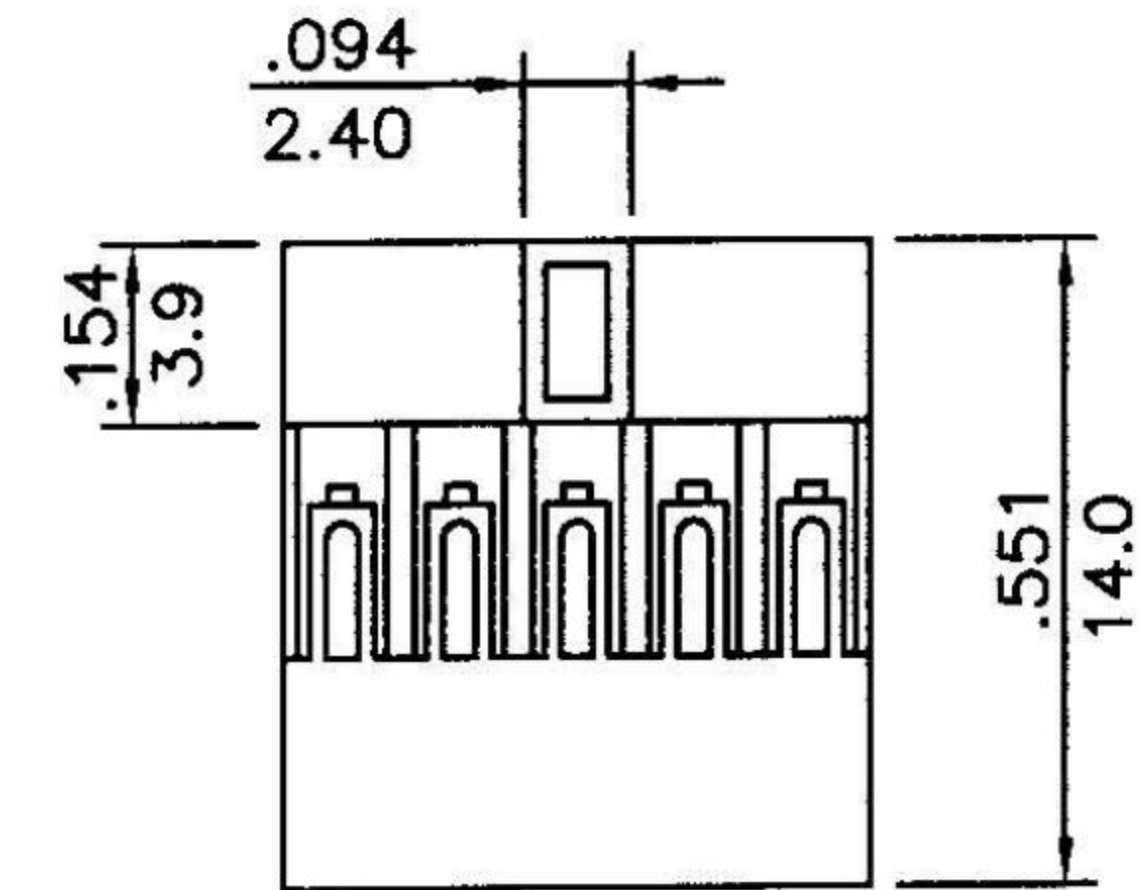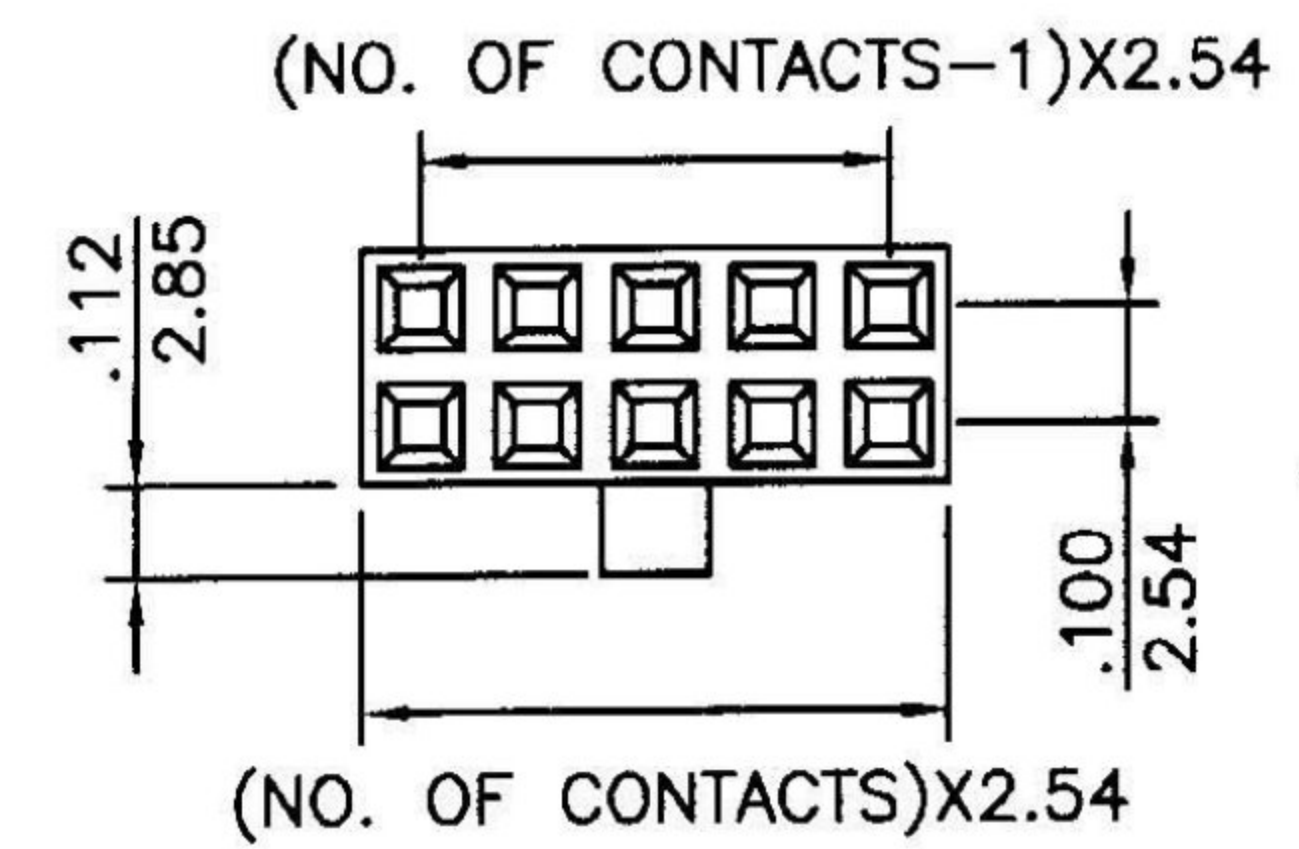

inches
mm

H **4000** — **XX** **P** **X** **X** **B** **0** **0** R

- | | | |
|--|--|--------------------------------|
| 1. PRODUCTS:
H:Housing | 4. CONTACT TYPE:
P:Non Distribution | 7. INSULATOR COLOR:
B:Black |
| 2. SERIES NO.:
4000 | 5. ROW TYPE:
D: Dual Rows | 8. FILL IT WITH "0" |
| 3. CONTACT NO.:
04(2x2)~80(2x40)
(Dual Rows) | 6. BODY OPTION:
Y:With Bump(Dual Rows Only)
N:Without Bump | 9. FILL IT WITH "0" |
- (Wafer:Match with C2100/C2200 Series)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.54mm HOUSING DUAL ROW 2XXXP BLACK COLOR ROHS
DWG. 製圖 ABBY		UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2011/12/20	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 H4000-XXPDXB00R