



SECT A-A

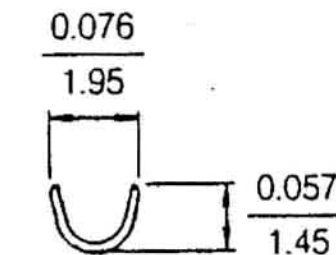

SECT B-B

SPECIFICATION

Current Rating: 2.5A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25C ~+85 C
 Contact Resistance: 10m ohms Min.
 Insulation Resistance: 1000M ohms Min.
 Withstanding Voltage: 800V AC/Minute.
 Wire Range: AWG 24-28
 Insulation O.D.: 1.8mm(Max)
 Material: Phosphor Bronze
 Finish: Tin Plated
 Q'ty: 10,000 pcs/Roll

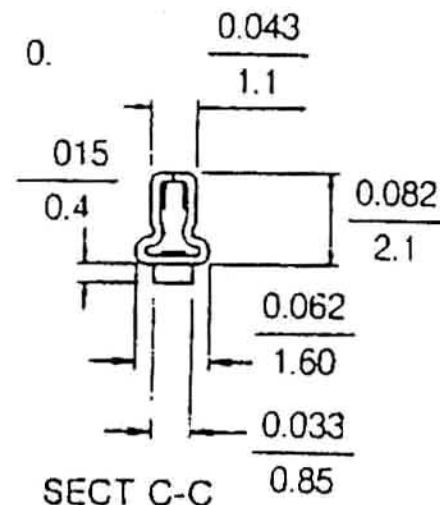

SECT C-C

玄茂科技股份有限公司

HSUAN MAO TECHNOLOGY CO.,LTD.

製表日:2000/05/14

DWG.	APPROVED
TINA	SHELLEY

UNIT

INCH
MM

SCALE

2 : 1

PART NAME

EH2.5 TERMINAL

APPD.

CKD.

TOLERANCE

± 0.5

PART NO.

T2520-XPL00000

REV.

A