


Specifications:  
 Current Rating:1.0 Amp  
 Contact resistance:30m Ohm Max. at 6V DC 0.3A  
 Insulator resistance:1000M ohm min. at 500V DC  
 Withstanding Voltage:500V AC/Minute  
 Operating Temperature Range:-40°~+105°C  
 Wire Size Flat Cable I.D.C: 1.00mm Pitch  
 AWG#28(standard) OR #30(Solid)  
 Material And Finish  
 Insulator:PBT&Glass-fiber reinforced UL94V-0  
 Insulator Color:Black  
 Contact:Phosphor Bronze  
 Contact Plating:See Contact Plating Tab.  
 Note:(\*)Marked is Important DIM For QC.

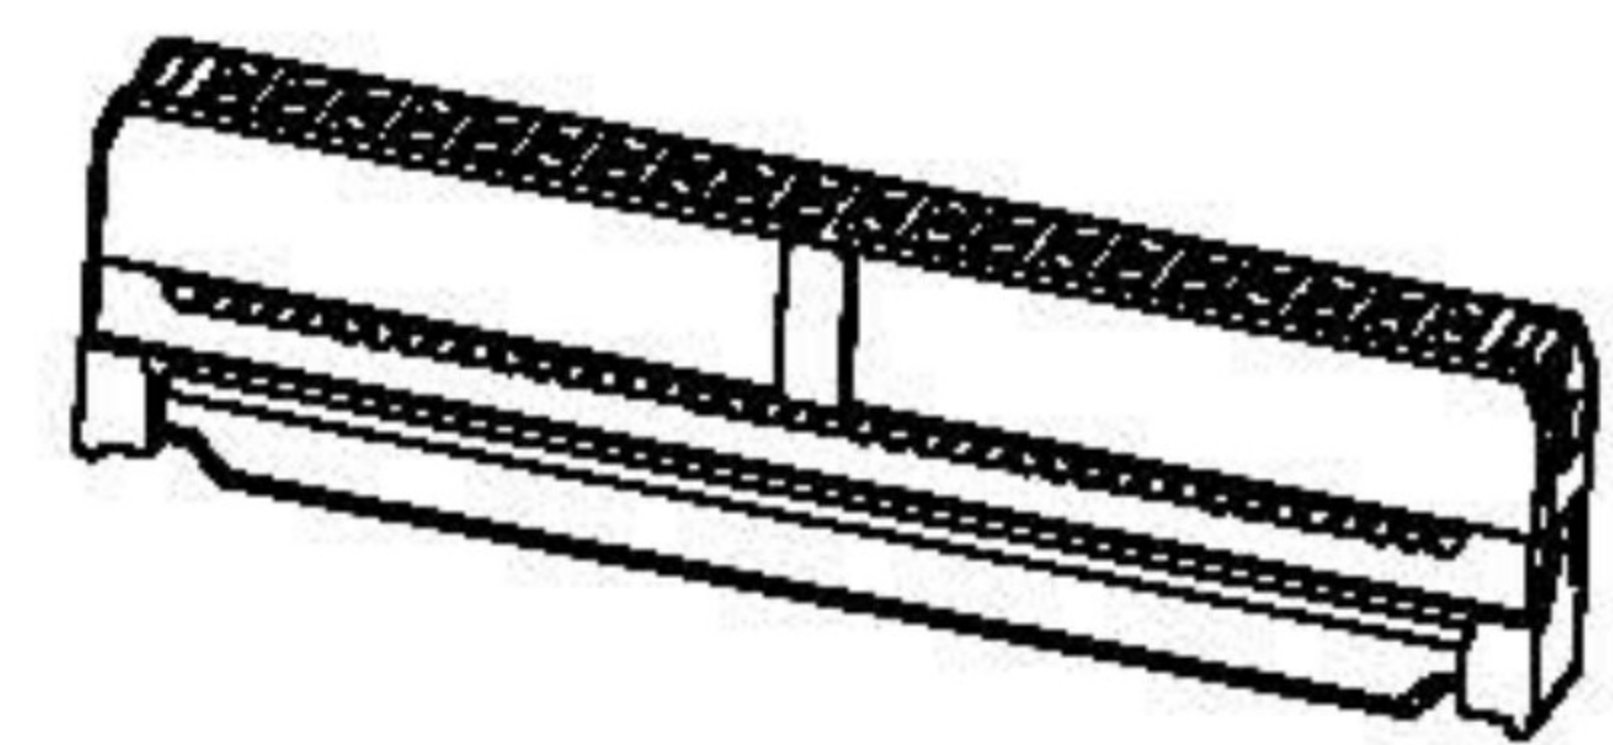

No. of Positions:

No.	A	B	C	D	No.	A	B	C	D	No.	A	B	C	D
06	11.34	4.00	5.00	11.14	20	25.34	18.00	19.00	25.14	36	41.34	34.00	35.00	41.14
08	13.34	6.00	7.00	13.14	22	27.34	20.00	21.00	27.14	40	45.34	38.00	39.00	45.14
10	15.34	8.00	9.00	15.14	24	29.34	22.00	23.00	29.14	44	49.34	42.00	43.00	49.14
12	17.34	10.00	11.00	17.14	26	31.34	24.00	25.00	31.14	50	55.34	48.00	49.00	55.34
14	19.34	12.00	13.00	19.14	28	33.34	26.00	27.00	33.14	60	65.34	58.00	59.00	65.14
16	21.34	14.00	15.00	21.14	30	35.34	28.00	29.00	35.14	64	69.34	62.00	63.00	69.14
18	23.34	16.00	17.00	23.14	34	39.34	32.00	33.00	39.14	68	73.34	66.00	67.00	73.14

APPD. 核准 HELEN DWG. 製圖 ABBY DATE 制表日 2012/07/05		SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1		TOLERANCE 容許公差 .X ± 0.35 .X' ± 5.0' .XX ± 0.25 .X' ± 3.0' .XXX ± 0.10 .XX' ± 2.0'		PART NAME 品名 IDC SOCKET 2.0mm X 2.0mm XXP WITH BUMP BLACK INSULATOR ROHS	
RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.		SIZE 紙張尺寸 A 4 REV. 版次 A		PART NO. 料號 C9200-XXXYXB00R	