



■ SPECIFICATIONS

- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 5,000M Ω min.
- Temperature Range : - 40°C to + 105°C
- Contact Resistance : 20m Ω max.
- Material : Noryl UL94V-1
- Q'ty : 1,000 pcs./Bag

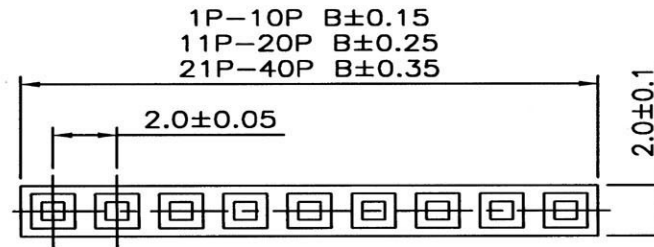

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
1	—	2.20	21	40.00	42.20
2	2.00	4.20	22	42.00	44.20
3	4.00	6.20	23	44.00	46.20
4	6.00	8.20	24	46.00	48.20
5	8.00	10.20	25	48.00	50.20
6	10.00	12.20	26	50.00	52.20
7	12.00	14.20	27	52.00	54.20
8	14.00	16.20	28	54.00	58.20
9	16.00	18.20	29	58.00	60.20
10	18.00	20.20	30	60.00	62.20
11	20.00	22.20	31	62.00	64.20
12	22.00	24.20	32	64.00	66.20
13	24.00	26.20	33	66.00	68.20
14	26.00	28.20	34	68.00	70.20
15	28.00	30.20	35	70.00	72.20
16	30.00	32.20	36	72.00	74.20
17	32.00	34.20	37	74.00	76.20
18	34.00	36.20	38	76.00	78.20
19	36.00	38.20	39	78.00	80.20
20	38.00	40.20	40	80.00	82.20

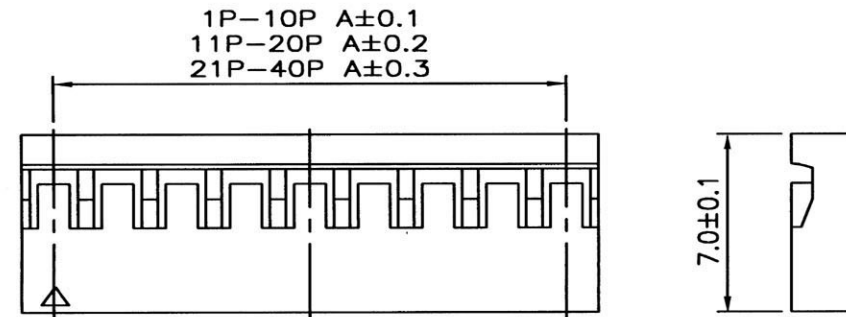

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 0 ± 0.3 .00 ± 0.2 ANG ±	PART NAME 品名 2.0mm HOUSING SINGLE ROW XXP ROHS LOW-LEAD
DWG. 製圖 HELEN	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 制表日 2008/7/1	PAGE 張數 1 OF 1	REV. 版本 A	PART NO. 料號 H1000-XXPSB000R